



**GENERAL NOTES:**


1. TEMPORARY FENCING IS REQUIRED FOR ALL MULTI-PHASE, HIGH-DENSITY DEVELOPMENTS, MEANING ANY APARTMENT/MULTI-FAMILY TYPE DEVELOPMENTS WITH MULTIPLE CERTIFICATE OF OCCUPANCIES.
2. THE TEMPORARY FENCE WILL ENCAPSULATE THE ENTIRE WORK ZONE AREA.
3. INSTALLATION LAYOUT OF THE WORK ZONE AREA WILL NEED TO HAVE PRIOR APPROVAL FROM THE DIRECTOR OF ENGINEERING.
4. SIGNAGE ALONG FENCE PERIMETER IS RECOMMENDED BUT NOT REQUIRED. IT WILL BE UP TO THE SOLE DISCRETION OF THE DEVELOPER IF HE OR SHE FEELS IT IS WARRANTED.

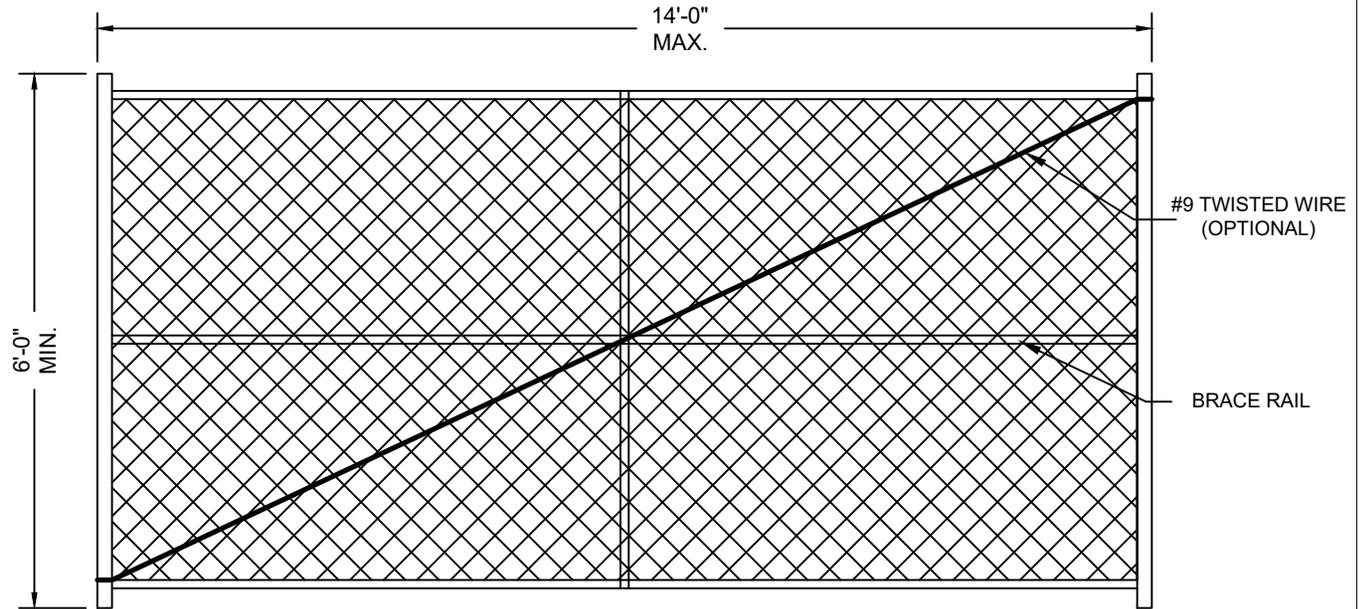

**TEMPORARY FENCE PANEL**

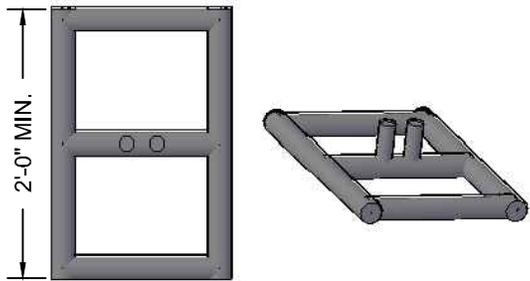

**TEMPORARY PANEL STAND  
(TWO PEGS)**

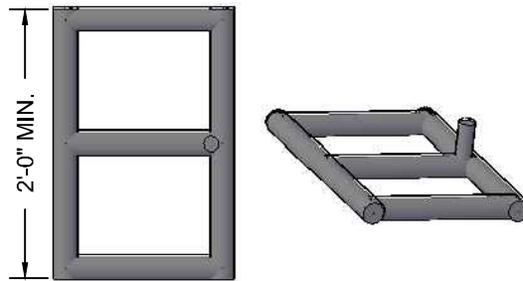

**TEMPORARY PANEL STAND  
(ONE PEG)**

**NOTES:**

1. MAXIMUM WIRE SPACING SHALL BE 6".
2. MAXIMUM CLEARANCE BETWEEN LOWEST STRAND AND GROUND SHALL BE 6".
3. MINIMUM PEG HEIGHT SHALL BE 6".
4. STANDS AND PIPE DIAMETERS VARY BY MANUFACTURING DIMENSIONS.
5. DARK GREEN PRIVACY FENCE SCREEN SHALL BE USED.
6. WIRE CLIPS/TIES MAY BE USED TO ATTACH FENCE SCREEN TO PANEL.
7. PANEL CLAMPS SHALL BE USED BETWEEN PANELS.



**TOWN OF INDIAN TRAIL  
STANDARD DETAIL**

**TEMPORARY FENCE**

REVISIONS	Scale
	Not To Scale
	Revision Date
	02/2021
	Detail #
	M_4.01