


TYPE N-4

CONCRETE DEPTH	
RAMP	6"
LANDING	4"

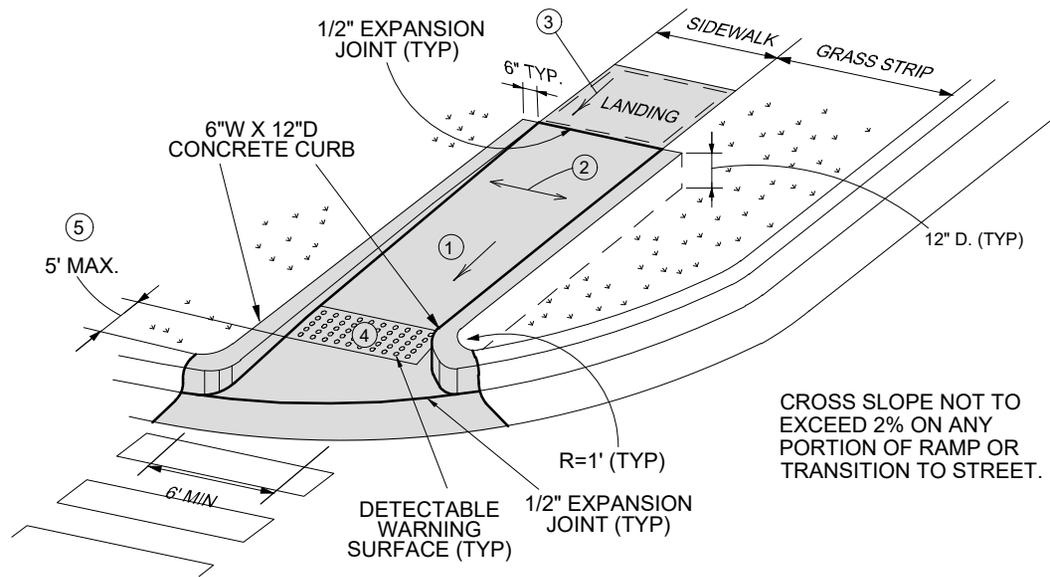

TYPE N-4A

PAY LIMITS FOR CURB RAMP

- ① SLOPE TO MEET GRADE, 15' MAXIMUM.
- ② CROSS SLOPE: 2.00%
- ③ CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.
- ④ RAMPS AND DOMES SHALL BE INSTALLED THE SAME WIDTH AS THE SIDEWALK.
- ⑤ IF LENGTH EXCEEDS 5', TRUNCATED DOMES SHALL BE INSTALLED ALONG THE BACK OF THE CURB COVERING THE FULL WIDTH OF THE RAMP.

CROSS SLOPE NOT TO EXCEED 2% ON ANY PORTION OF RAMP OR TRANSITION TO STREET.

CROSS SLOPE NOT TO EXCEED 2% ON ANY PORTION OF RAMP OR TRANSITION TO STREET.



**TOWN OF INDIAN TRAIL
STANDARD DETAIL
CURB RAMPS
(NEW DEVELOPMENT)**

REVISIONS	Scale
	Not To Scale
	Revision Date
	02/2021
	Detail #
	T_16.04