


TYPE R-1

PAY LIMITS FOR CURB RAMP


CONCRETE DEPTH	
RAMP / FLARES	6"
LANDING	4"

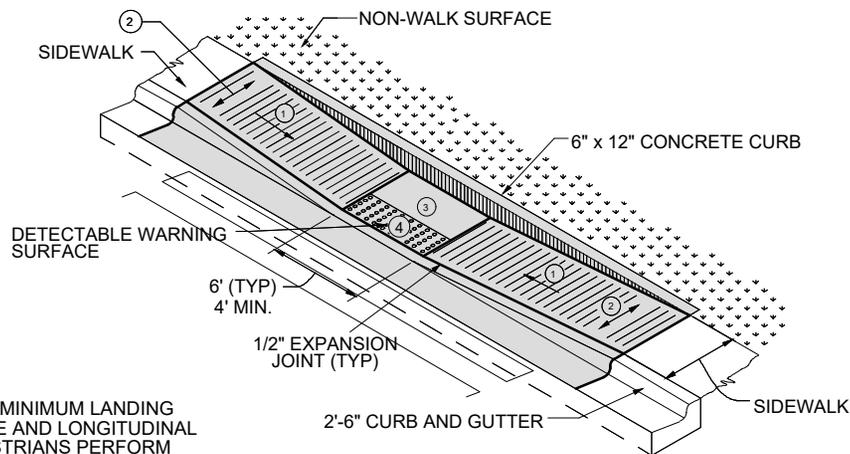

TYPE R-2


(USE ONLY WHERE WATER WILL NOT POND WITHIN LANDING)

- ① 8.33% (12:1) MAX RAMP SLOPE
- ② CROSS SLOPE: 2.00%
- ③ CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.
- ④ RAMPS AND DOMES SHALL BE INSTALLED THE SAME WIDTH AS THE SIDEWALK.
- ⑤ IF LENGTH EXCEEDS 5', TRUNCATED DOMES SHALL BE INSTALLED ALONG THE BACK OF THE CURB COVERING THE FULL WIDTH OF THE RAMP.

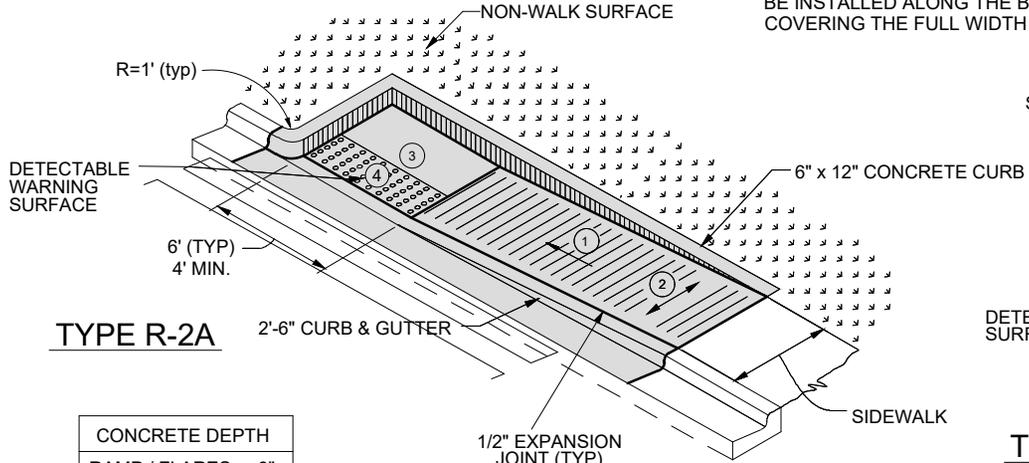

TYPE R-2A

CONCRETE DEPTH	
RAMP / FLARES	6"
LANDING	4"

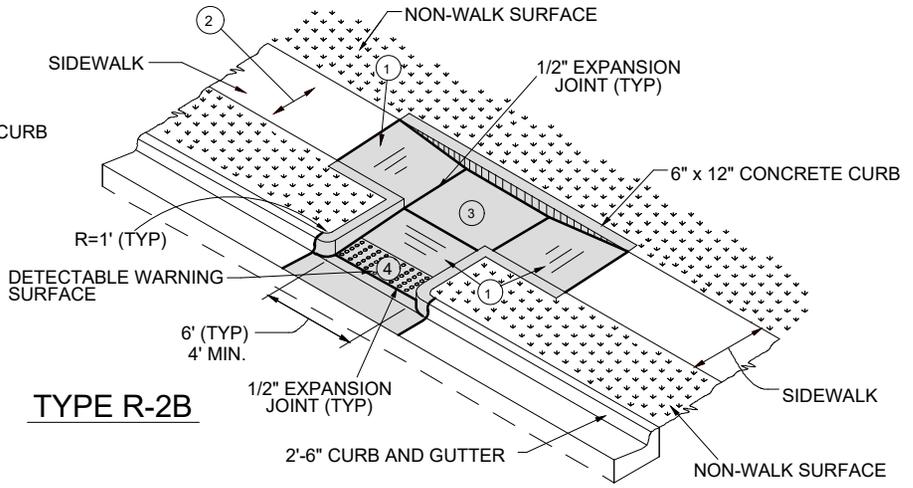

TYPE R-2B



**TOWN OF INDIAN TRAIL
STANDARD DETAIL**

CURB RAMPS (RETROFIT)

REVISIONS	Scale
	Not To Scale
	Revision Date
	02/2021
	Detail #
	T_16.05