



**SMALL RADIUS  
LESS THAN 15'**

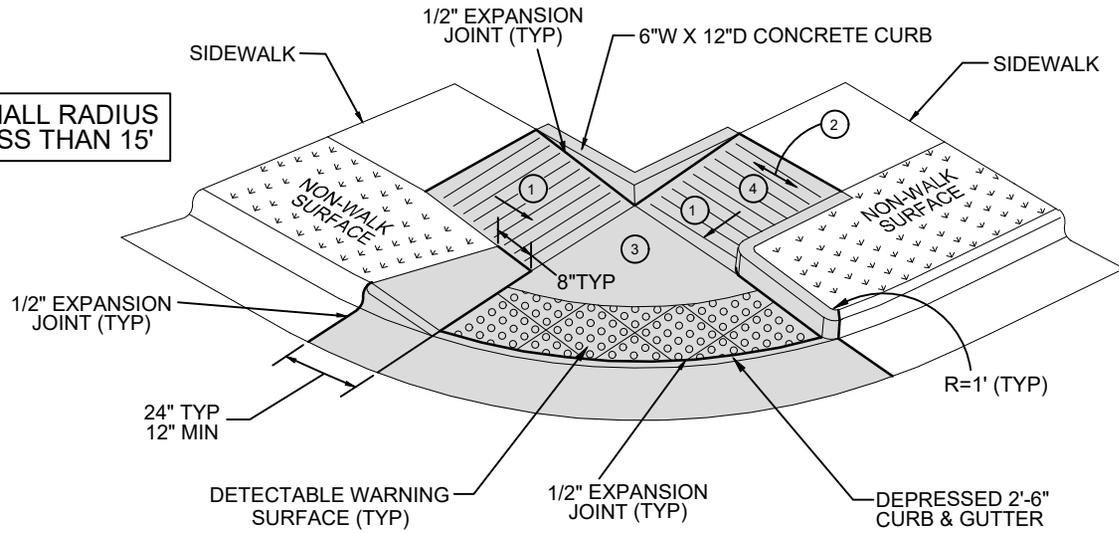

CONCRETE DEPTH	
SIDE RAMPS	4"
LANDING & CURB RAMPS	6"

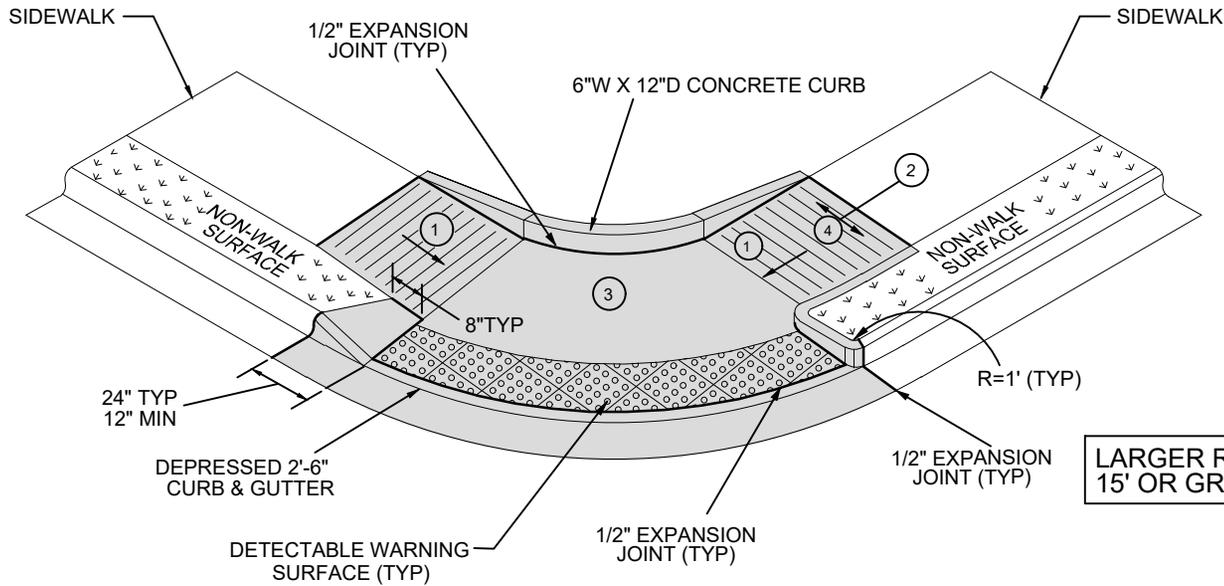

- ① 8.33% (12:1) MAX RAMP SLOPE
- ② CROSS SLOPE: 2.00%
- ③ CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.
- ④ RAMPS SHALL BE INSTALLED THE SAME WIDTH AS THE SIDEWALK.

**LARGER RADIUS  
15' OR GREATER**



**TOWN OF INDIAN TRAIL  
STANDARD DETAIL**

**SHARED CURB RAMP / FLARE (RETROFIT)**

REVISIONS	Scale
	Not To Scale
	Revision Date
	02/2021
	Detail #
	T_16.07